


Xingto Battery 14S25AH Specifications

一. Scope of application

This product specification describes the performance indicators of the solid-state lithium-ion battery pack produced by **Zhuoxun Intelligent Technology (Henan) Co., Ltd.** Note: The solid-state lithium-ion battery pack described in this specification refers to a lithium-ion battery with solid-state technology (solid-liquid hybrid).

二.Product size

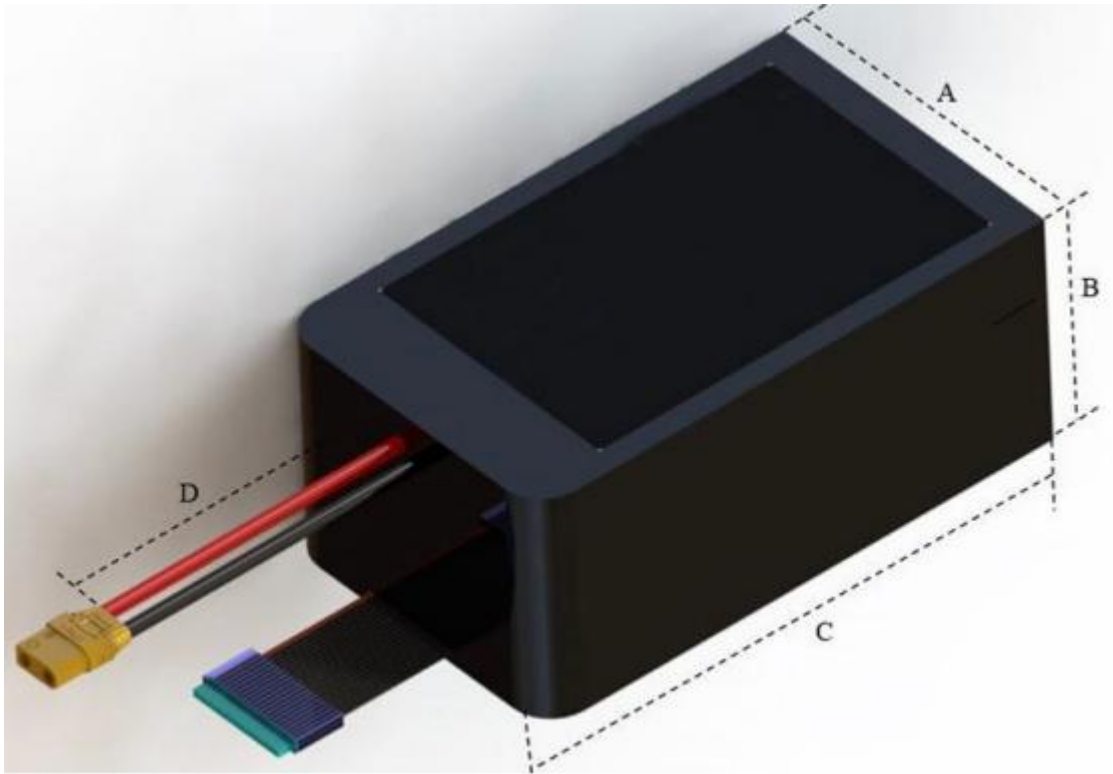

Code	Name	size($\pm 5\text{mm}$)
A	width	151mm
B	Thickness (max).	75mm
C	length	195mm
D	Long leakage line	$\geq 200\text{mm}$
	Power cord terminals	Optional
	Balance head	Optional

三. Product Specifications

serial number	project		Technical indicators
1	Nominal capacity		25Ah (0.5C)
2	Minimum capacity		24.8Ah (0.5C)
3	Nominal voltage		51.8V
4	Charging voltage		58.8V
5	Termination voltage		39.2V
6	Charging method	fast	1C (25A) Constant current (CC) Charge to 58.8V, then constant voltage (CV) Charge until the charge current is less than 0.02C (0.50A)
		standard	0.5C (12.5A) Constant current (CC) Charge to 58.8V, then constant voltage (CV) Charge until the charge current is less than 0.02C (0.50A)
7	Discharge method	pulse	10C (250A、duration≤10S) 5C (125A)
		Magnification	3C (75A)
		standard	0.5C (12.5A)
8	Operating temperature		Charge: 0°C~45°C Discharge: -10°C~55°C
10	Storage temperature		Short-term storage (1month):-20°C~45°C Long-term storage(6 months) : -10°C~35°C
11	Storage humidity		<75%RH
12	Internal resistance(max)		<18mΩ
13	weight (max)		<4.77Kg
14	Factory voltage		49V~51.6V
15	Outer carton size		310*255*350mm(Please refer to the actual situation)
16	Package weight		<10.10Kg