


Xingto Battery 12S48AH Specifications

一. Scope of application

This product specification describes the performance indicators of the solid-state lithium-ion battery pack produced by **Zhuoxun Intelligent Technology (Henan) Co., Ltd.** Note: The solid-state lithium-ion battery pack described in this specification refers to a lithium-ion battery with solid-state technology (solid-liquid hybrid).

二. Product size

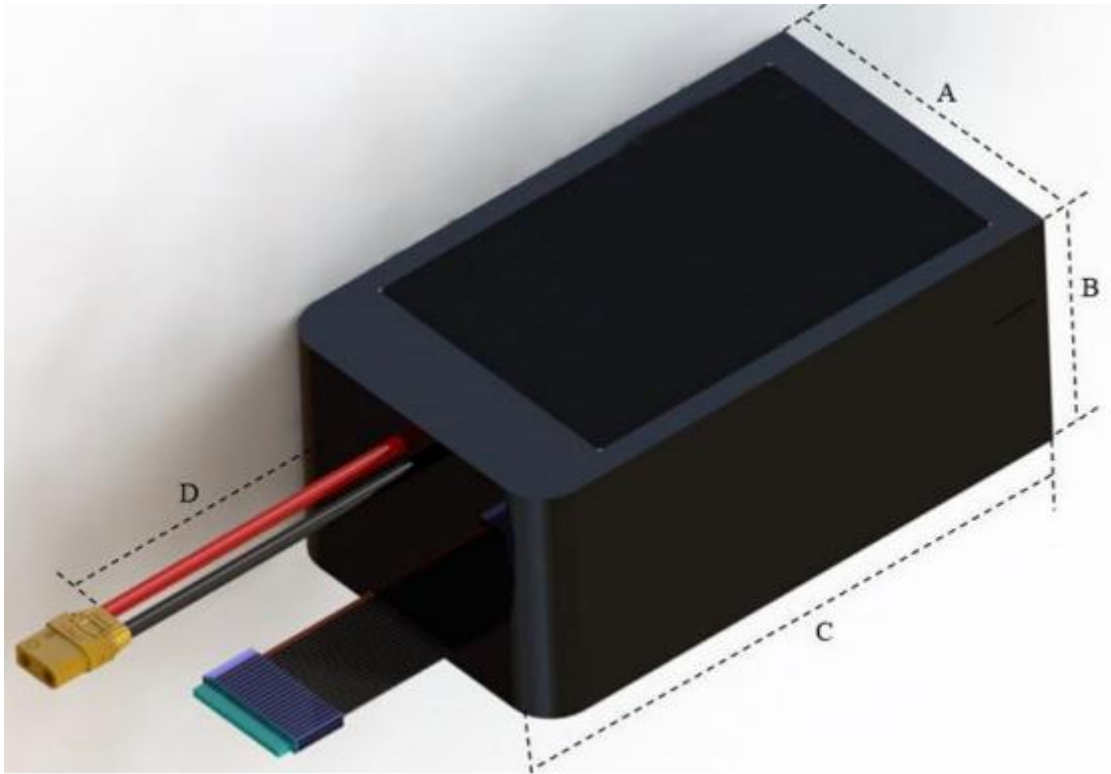

Code	Name	Strip shape size($\pm 5\text{mm}$)	square size($\pm 5\text{mm}$)
A	width	262mm	132
B	Thickness (max).	90mm	180
C	length	213mm	215
D	Long leakage line	$\geq 200\text{mm}$	
	Power cord terminals	Optional	
	Balance head	Optional	

三. Product Specifications

serial number	project		Technical indicators
1	Nominal capacity		48Ah (0.5C)
2	Minimum capacity		47.5Ah (0.5C)
3	Nominal voltage		44.4V
4	Charging voltage		50.4V
5	Termination voltage		31.2V
6	Charging method	fast	1C (48A) Constant current (CC) Charge to 50.4V, then constant voltage (CV) Charge until the charge current is less than 0.02C (0.96A)
		standard	0.5C (24A) Constant current (CC) Charge to 50.4V, then constant voltage (CV) Charge until the charge current is less than 0.02C (0.96A)
7	Discharge method	pulse	10C (480A、duration≤10S) 5C (240A)
		Magnification	3C (144A)
		standard	0.5C (24A)
8	Operating temperature		Charge: 0°C~45°C Discharge: -10°C~55°C
10	Storage temperature		Short-term storage (1month):-20°C~45°C Long-term storage(6 months) : -10°C~35°C
11	Storage humidity		<75%RH
12	Internal resistance(max)		<18mΩ
13	weight (max)		<7.74Kg
14	Factory voltage		42V~43.8V
15	Outer carton size		310*255*350mm(Please refer to the actual situation)
16	Package weight		<8.5Kg