


Xingto Battery 18S64AH Specifications

一. Scope of application

This product specification describes the performance indicators of the solid-state lithium-ion battery pack produced by **Zhuoxun Intelligent Technology (Henan) Co., Ltd.** Note: The solid-state lithium-ion battery pack described in this specification refers to a lithium-ion battery with solid-state technology (solid-liquid hybrid).

二. Product size

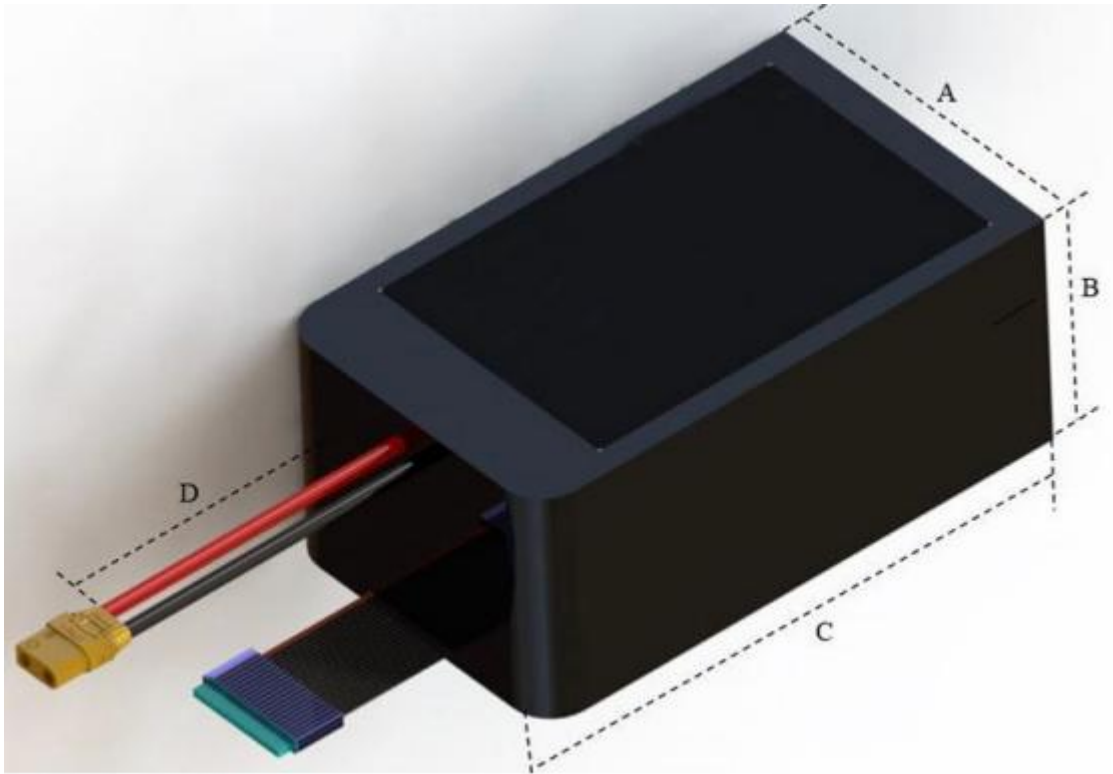

Code	Name	Square size($\pm 5\text{mm}$)
A	width	190mm
B	Thickness (max).	180mm
C	length	218mm
D	Long leakage line	$\geq 200\text{mm}$
	Power cord terminals	Optional
	Balance head	Optional

三. Product Specifications

serial number	project		Technical indicators
1	Nominal capacity		64Ah (0.5C)
2	Minimum capacity		63.5Ah (0.5C)
3	Nominal voltage		66.6V
4	Charging voltage		75.2V
5	Termination voltage		50.4V
6	Charging method	fast	1C (64A) Constant current (CC) Charge to 75.2V, then constant voltage (CV) Charge until the charge current is less than 0.02C (1.28A)
		standard	0.5C (32A) Constant current (CC) Charge to 75.2V, then constant voltage (CV) Charge until the charge current is less than 0.02C (1.28A)
7	Discharge method	pulse	10C (640A、duration≤10S) 5C (320A)
		Magnification	3C (192A)
		standard	0.5C (32A)
8	Operating temperature		Charge: 0°C~45°C Discharge: -10°C~55°C
10	Storage temperature		Short-term storage (1month):-20°C~45°C Long-term storage(6 months) : -10°C~35°C
11	Storage humidity		<75%RH
12	Internal resistance(max)		<18mΩ
13	weight (max)		<15.2Kg
14	Factory voltage		63V~66.5V
15	Outer carton size		350*270*360mm(Please refer to the actual situation)
16	Package weight		<16.5Kg